




Custom Made Single Phase Isolating Transformers

A range of single phase transformers designed for optimum performance using low watt loss laminations. Transformers have terminal block or stud connectors for higher current. Fixing up to 6000VA is by UEF frames, up to 25KVA by angle brackets.

Designed to customers requirements with copper earth screen fitted as standard. All transformers are vacuum varnished impregnated in class H polyester varnish they are designed to operate in a ambient temperature of 30°C without derating. A full range of [wall/floor mounted enclosures are available](#).



Custom Made Single Phase Autotransformer also available.

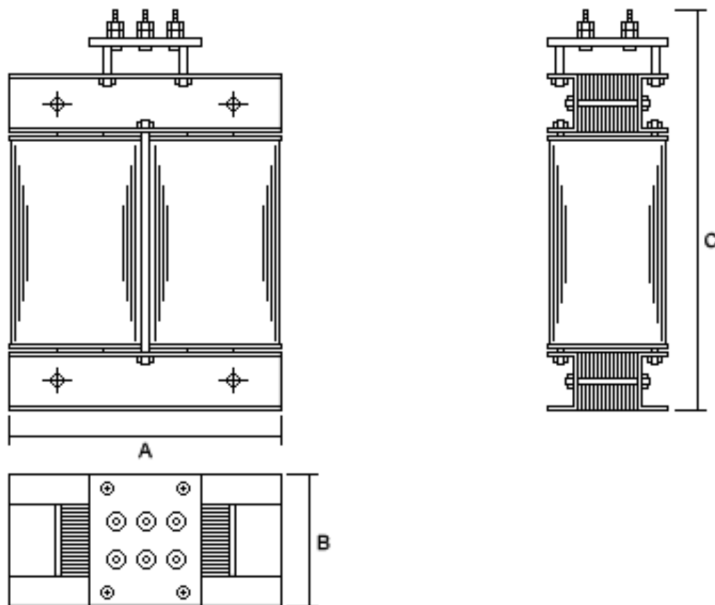

Custom Made Single Phase Isolating Transformers

Rating	Dimensions (mm)			Weight (kg)	Enclosure
	Width (A)	Depth (B)	Height (C)		
50VA	75	66	85	1.1	P1
100VA	98	72	100	2.0	P1
150VA	98	78	100	2.5	P1
200VA	120	88	115	3.6	P2
250VA	120	94	115	4.0	P2
300VA	120	100	115	4.5	P2
350VA	120	104	115	4.6	P2
400VA	135	104	135	5.5	P3
500VA	135	110	135	6.9	P3
750VA	167	126	155	10.9	P4
1000VA	167	136	155	14.1	P4
1500VA	215	160	200	20.1	P5
2000VA	215	170	200	25.3	P5
2500VA	235	175	225	28.3	P5
3000VA	235	190	225	32.6	P5
4000VA	285	240	300	46.3	P6
5000VA	285	270	300	58.00	P6
6000VA	285	290	300	66.00	P6
7500VA	280	220	400	70.00	P6
10000VA	280	230	400	85.00	P7
12500VA	280	240	400	90.00	P7
15000VA	320	240	460	100.00	T3
17500VA	320	260	460	115.00	T3
20000VA	320	280	460	130.00	T3
25000VA	320	300	460	145.00	T3

Larger sizes available on request - [contact us](#)